

Product family datasheet

Technical data

Electrical data


Product description	Nominal input voltage	Nominal output voltage	U-OUT (working voltage)	Nominal output power	Galvanic isolation
OT BLE DIM	12...24 V	12...24 V	24 V	240 W	Non isolated

Dimensions & weight

Product description	Mounting hole spacing, length	Mounting length	Product weight	Cable cross-section, input side	Cable cross-section, output side
OT BLE DIM	164.0 mm	164.0 mm	200.00 g	0.5...1.5 mm ²	0.5...1.5 mm ²

Product description	Wire preparation length, input side	Wire preparation length, output side	Length	Width	Height
OT BLE DIM	10 mm	10 mm	172.0 mm	42.0 mm	20.0 mm

Product line drawing

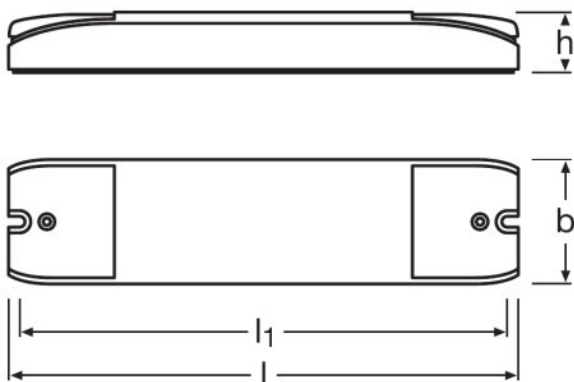

OT BLE DIM

Product family datasheet

Colors & materials

Product description	Casing material
OT BLE DIM	Plastic

Temperatures & operating conditions

Product description	Ambient temperature range	Maximum temperature at tc test point	Temperature range at storage	Permitted rel. humidity during operation
OT BLE DIM	-20...+45 °C	65 °C	-40...+85 °C	5...85 % ¹⁾

¹⁾ Maximum 56 days/year at 85 %

Lifespan

Product description	ECG lifetime
OT BLE DIM	50000 h ¹⁾

¹⁾ At $T_{case} = 65^{\circ}\text{C}$ at T_c point / 10% failure rate

Capabilities

Product description	Dimmable	Dimming interface	Dimming range	Dimming method
OT BLE DIM	Yes	Bluetooth Low Energie	0...100 %	Pulse Width Modulation

Product description	Overheating protection	Overload protection	No-load proof	Suitable for fixtures with prot. class
OT BLE DIM	Yes ¹⁾	Yes ¹⁾	Yes	III

Product description	Type of connection, output side	Number of channels
OT BLE DIM	Screw terminal	4

¹⁾ In combination with OPTOTRONIC power supply

Certificates & standards

Product description	Approval marks – approval	Standards	Type of protection
OT BLE DIM	CE	Acc. to EN 55015/Acc. to EN 61547/Acc. to EN 61347-2-11/Acc. to ETSI EN 300 328/Acc. to ETSI EN 301 489-17	IP20

Product family datasheet

Logistical data

Product description	Commodity code
OT BLE DIM	853710989900

Environmental information

Product description	Date of Declaration	Primary Article Identifier	Candidate List Substance 1
OT BLE DIM	23-12-2021	4052899557833	No declarable substances contained

Product description	CAS No. of substance 1	Declaration No. in SCIP database
OT BLE DIM	No CAS	No declarable substances contained








Application advice

For more detailed application information and graphics please see product datasheet.

Sales and Technical Support

Sales and Technical Support www.osram.com

Download Data

File
 User instruction OPTOTRONIC LED Power Supply
 User instruction OPTOTRONIC LED Power Supply
 Product Datasheet Product datasheet OT BLE DIM (EN)
 Brochures OPTOTRONIC constant-voltage LED power supplies and controls (EN)
 Brochures Light is smart color control - Intuitive light management (EN)
 Declarations of conformity EU Declaration of Conformity 3595862
 CAD data 3-dim OT BLE DIM _ 3D igs file

Product family datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899557833	OT BLE DIM	Shipping carton box 20	351 mm x 222 mm x 68 mm	5.30 dm ³	4530.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.